



# Vacuum Glass Lifter serie VB4+4 RCMBM **800 kg**

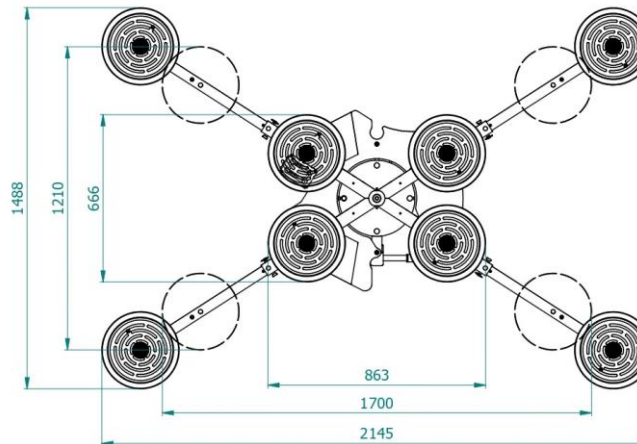

## Technical specification

Application	Glass panels
Lifting capacity	Max 800 kg
Suction pads	No. 8 round suction pads diameter 310 mm ( 4 fixed pads + 4 pads on removable extension arms ) Lipped pads with safety ring
Load movement	Continuous 360 degree manual rotation 90 degree manual tilt
Pad spread	4 pads configuration mm 863 x 666 8 pads configuration mm 1700 x 1210 / 2145 x 1488
Operating system	DC vacuum pump powered from on-board batteries high capacity re-chargeable batteries battery status indicator economizer for reduction of the energy consumption
Vacuum system	2 independent vacuum circuits, each vacuum circuit with vacuum reserve and non return valve
Weight of lifter	95 kg
Structural depth	mm 250
Control	Manual on off valve on the lifter's frame Release of the load by dual action security command Remote control as optional
Standard features	Audible and visual low vacuum warning devices Vacuum gauge for each vacuum circuit Battery charger 240 Volt Vacuum filter Multi position hook connection Lowered suspension for installing of transom window

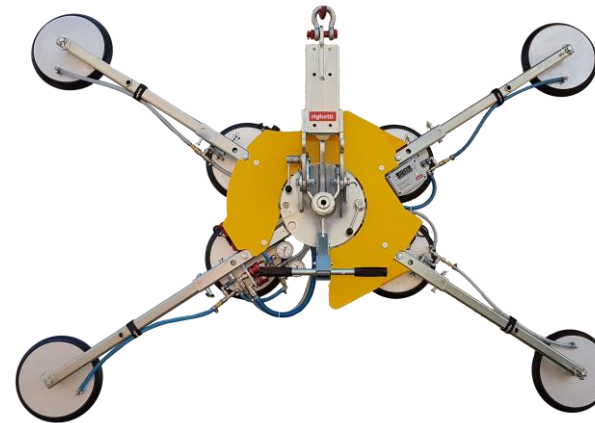

- **battery operating system**

- 4+4 suction pads

- Manual continues 360° rotation
- Manual 90° tilt

- Lifting capacity 800 kg

- Safety devices

✓ Dual vacuum circuit built to EN13155 standard

